

# Hiab Multilift XP Classic range hooklifts



Basic data


XP22S

## Technical data

### Type

**XP22S**

Vehicle type	3-axle				
GVW of the vehicle (t)	26				
Capacity (t)	22				
G-length	46	51	53	56	59
System weight (kg) *	2290	2380	2470	2500	2530
Tipping angle (°)	50	49	53	49	53
Max. operating pressure (MPa)	30				
Recommended max. oil flow (l/min)	100				

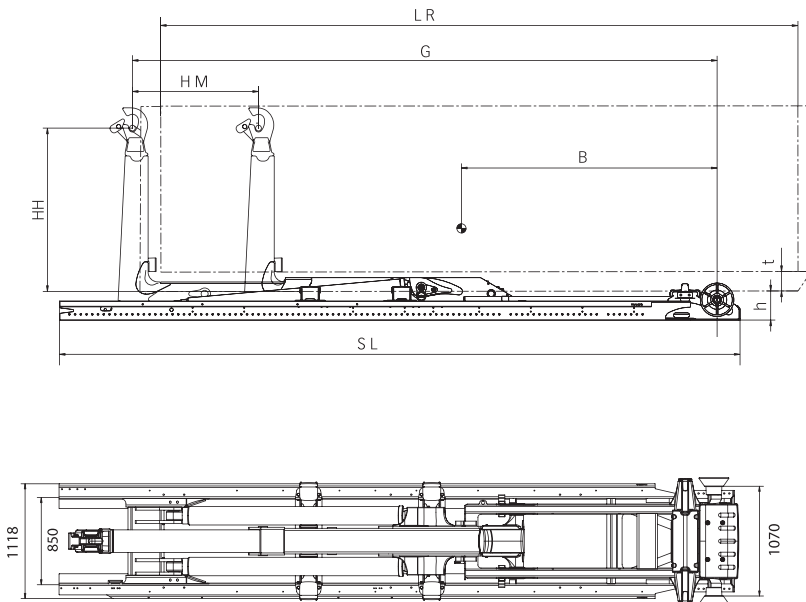

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they can be CE marked. We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

## Primary dimensions

Model	XP22S.46	XP22S.51	XP22S.53	XP22S.56	XP22S.59
LR = Body length (m) min - max	4.0 - 5.6	4.3 - 6.1	4.5 - 6.4	4.7 - 6.6	4.7-6.9
SL = Subframe length (mm) **	5333	5933	6563	6563	6563
B = Centre of gravity (mm)	2450	2700	2850	2950	3000
G = Exact g-length (mm)	4580	5080	5360	5580	5860
HM = Horizontal movement (mm)	900	1100	1100	1100	1450
t = Min. free tunnel height (body) (mm)				125	
h = Installation height (mm)				250	
HH = Hook height (mm) ***				1570	

*Cargotec improves the efficiency of cargo flows on land and at sea - wherever cargo is on the move. Cargotec's brands MacGregor, Kalmar and Hiab are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. [www.cargotec.com](http://www.cargotec.com)*



**CARGOTEC**  
**DAI LIENG TRADING SDN BHD (223694-K)**  
 Lot 2541, Jalan Manettia, Piasau Lorong 8,  
 Pujut-Lutung Road, P.O.Box 1337,  
 98000 Miri, Sarawak, Malaysia.  
 Tel: +60 85 655855 Fax: +60 85 655618  
 Email : [headoffice@dailieng.com.my](mailto:headoffice@dailieng.com.my)  
 Website : [www.dailieng.com.my](http://www.dailieng.com.my)